
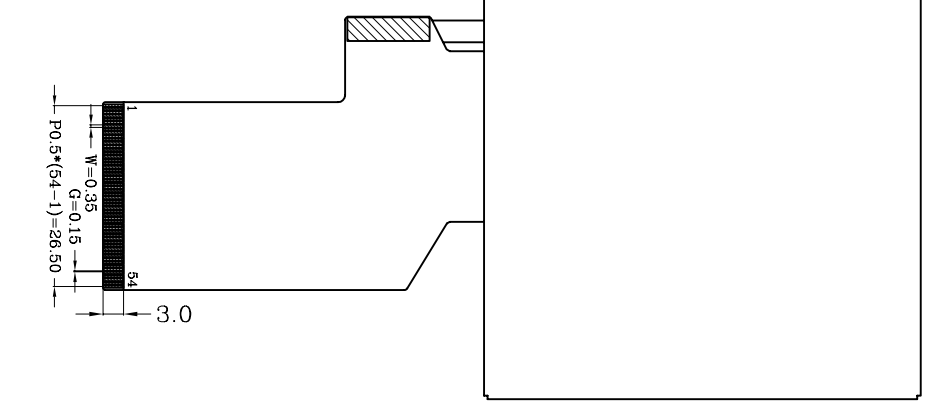
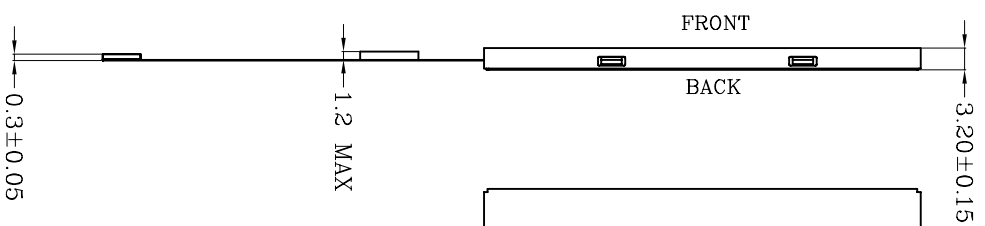


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2015-03-09

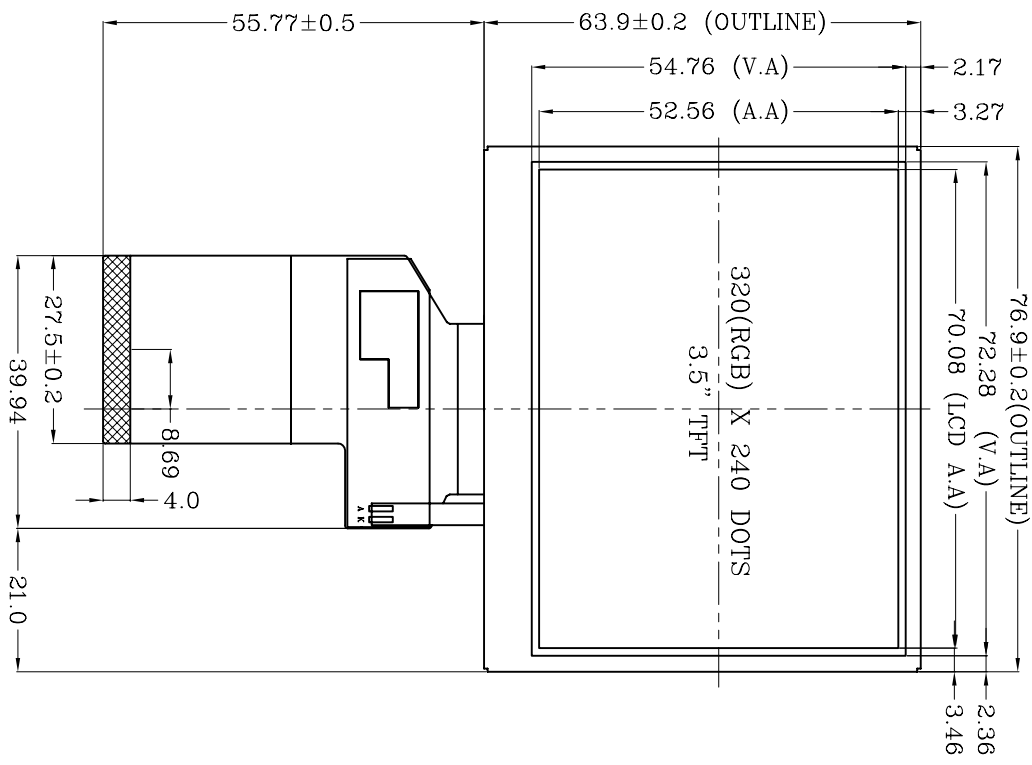

A. B/L CIRCUIT DIAGRAM(LED 6 DIES) K

1	LED_Cathode	28	R0
2	LED_Cathode	29	R1
3	LED_Anode	30	R2
4	LED_Anode	31	R3
5	NC	32	R4
6	NC	33	R5
7	NC	34	R6
8	/RSTRT	35	R7
9	SPENA	36	HSYNG
10	SPCLK	37	VSYNG
11	SPDAT	38	DOTCLK
12	B0	39	NC
13	B1	40	NC
14	B2	41	VCCIO(1.8V)
15	B3	42	VDD(3.3V)
16	B4	43	NC
17	B5	44	NC
18	B6	45	NC
19	B7	46	NC
20	G0	47	NC
21	G1	48	NC
22	G2	49	NC
23	G3	50	NC
24	G4	51	NC
25	G5	52	ENB(DEN)
26	G6	53	DGND
27	G7	54	AVSS

SPECIFICATIONS

- LUMINANCE: 250cd/m²(TYP)
- DISPLAY MODE: a. SI TFT / TRANSMISSIVE / NORMAL WHITE
- DRIVER IC: HX8238-D
- OPERATIVE TEMP: -20° C~+70° C
- STORAGE TEMP: -30° C~+80° C

NOTE:

MECHANICAL TOL: ±0.2 UNLESS SPECIFIED

DESCRIPTION:

SCALE: FIT
SHEET: 1 OF 1
MODEL: TT350A-08
TINSHARP INDUSTRIAL CO., LTD.

C/D

TINSHARP
SERIAL NUMBER: ZHJ0146

UNIT: mm	PROJECTION	CHK	DATE:
APP:	MODEL: TT350A-08	DWN	DATE: