


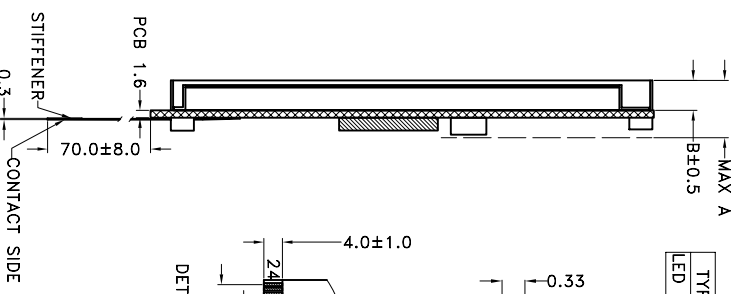



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2013-07-26

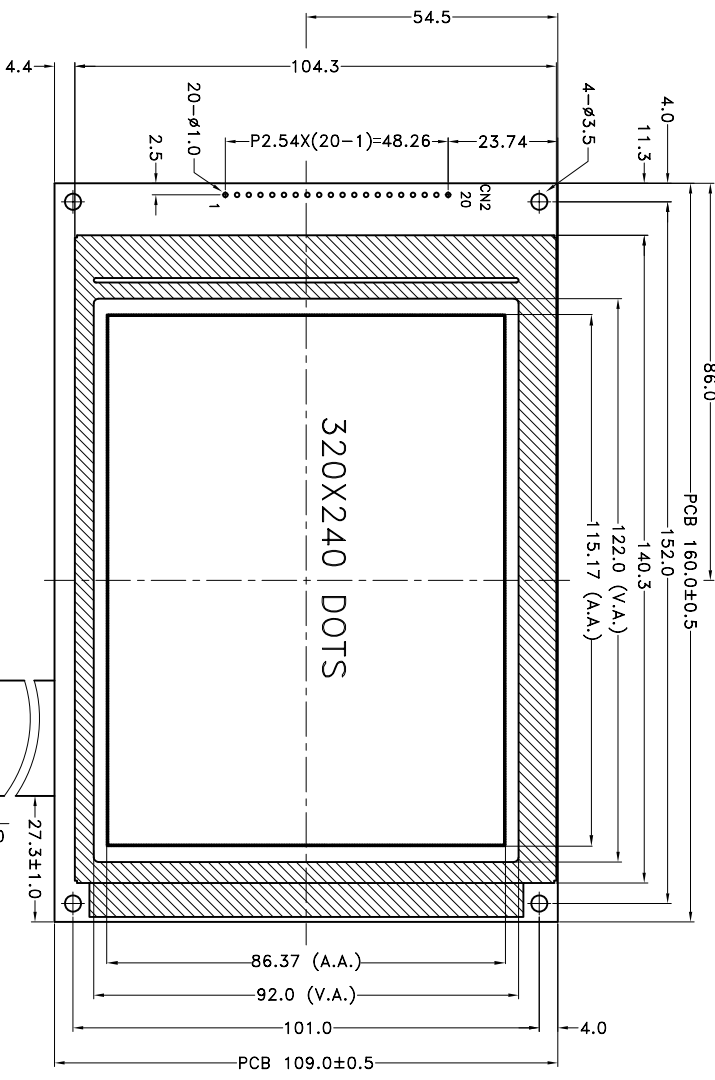

CN1		CN2																																						
NAME	/RES	/RD	/WR	/CS	AO	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	VSS	VEE	VADJ	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC	NC		
PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24																

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE/Anti-UV
2. LCD DRIVING VOLTAGE: 24.0V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 12 O'CLOCK
5. OPERATING TEMP: -20° C--+70° C
6. STORAGE TEMP: -30° C--+80° C
7. DRIVE MODE: 1/240 DUTY,1/16 BIAS
8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP		TINSHARP
SHEET: 1 OF 1	INDUSTRIAL CO.,LTD.		
UNIT: PROJECTION	MODEL	MODEL	SERIAL NUMBER
mm	TG320240D-06T		JULY0497
APP:	CHK:	DWN:	
DATE:	DATE:	DATE:	