



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2014-10-21

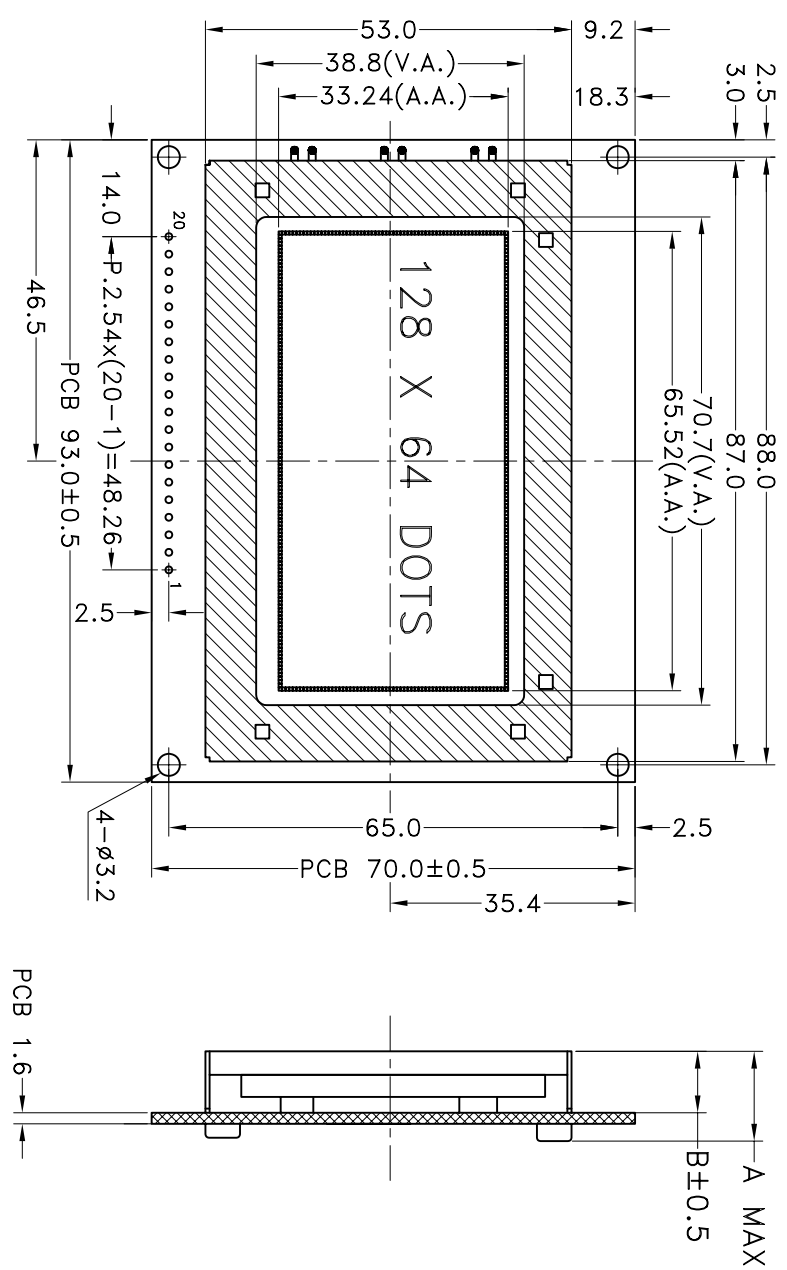

TYPE	A	B
LED B/L	13.5	8.9



DOTS DETAIL
SCALE: 10:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
NAME	GND	VDD	NC	RS	NC	NC	CLK	SID	RES	NC	NC	NC	NC	NC	/CS	NC	NC	NC	LED-	LED+

VIEWING

SPECIFICATIONS

1. DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
2. LCD DRIVING VOLTAGE: 10.0V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP.: -20° C~70° C
6. STORAGE TEMP.: -30° C~80° C
7. DRIVE MODE: 1/65 DUTY, 1/9 BIAS
8. BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
9. OTHER:

NOTE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT
SHEET: 1 OF 1
MODEL: T1G12864R-041
SERIAL NUMBER: ZMQ0392

TINSHARP INDUSTRIAL CO.,LTD.
TINSHARP

UNIT: mm	PROJECTION	APP: DATE:	CHK: DATE:	DWN: DATE:
----------	------------	------------	------------	------------